


GENERAL NOTES:

1. MANHOLE RING AND COVERS CANNOT BE COVERED, OR OBSCURED BY LANDSCAPING, PAVEMENT, ETC.
2. INLET AND OUTLET PIPES SHOULD BE SCHEDULE 40 PVC, AND CANNOT BE COVERED OR CAPPED.
3. INLET PIPE MUST BE A MINIMUM OF 4" IN DIAMETER. VERTICAL PIPE ON OUTLET SIDE MUST BE A MINIMUM OF 6" IN DIAMETER.
4. SEPARATOR SHOULD NOT BE LOCATED IN AN ENTRANCE, EXIT, DRIVE-THRU, OR UNDER A MENU BOARD. IF SEPARATOR IS LOCATED IN A DRIVE/PARKING AREA, IT MUST CONTAIN TRAFFIC RATED RINGS AND COVERS AND MEET H-20 LOADING.
5. MINIMUM SIZE : 1000 GALLONS

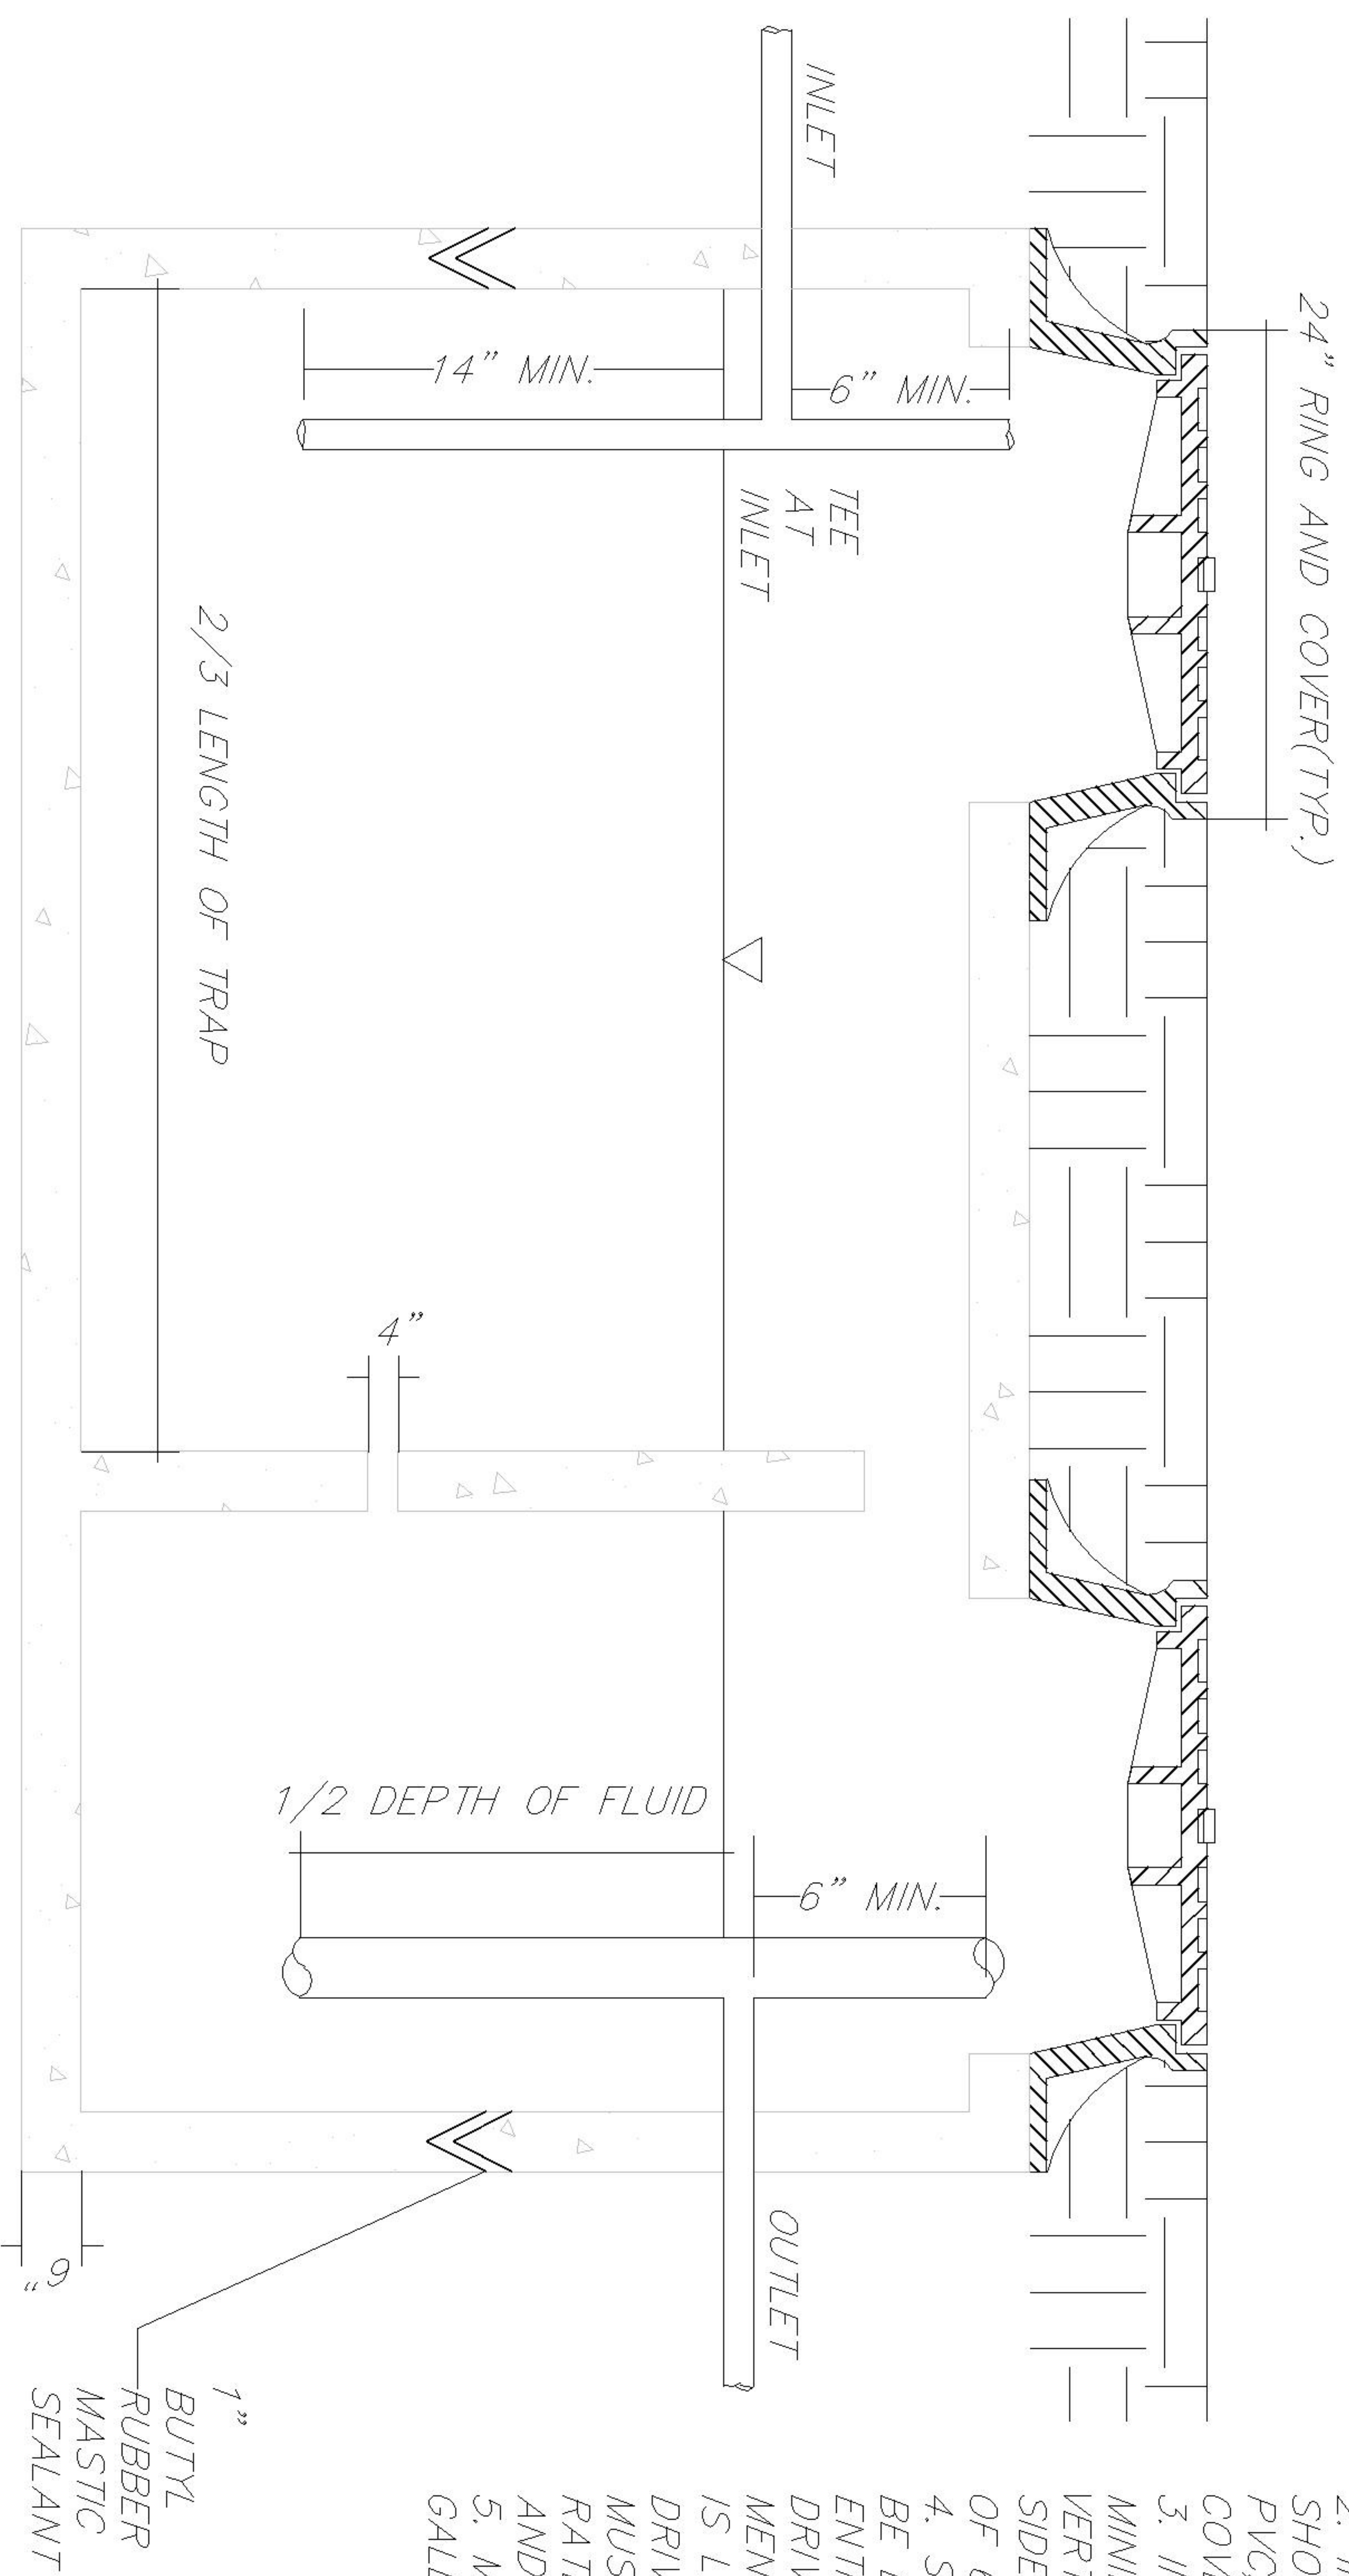

REVISED F.B. PG. DATE: 7/29/02

SCALE: NTS

DRAWN BY: MHW

CHECKED BY: DFD

CITY ENGINEER: FAP

STANDARD DETAIL

IN GROUND OIL/GRIT SEPARATOR

OFFICE OF THE  
CITY ENGINEER

GASTONIA, N.C.

FILE NO. 71B-29